


Hawkeye® 923

The Hawkeye 923 provides accurate load trending information with a proportional 0-10VDC output signal. Preset slide switches provide easy field adjustment of sensed amperage range without clumsy jumpers.

Split-Core 0-10VDC Output Self-Powered



Maximize Reliability,
Minimize Installed Cost

APPLICATIONS

- Load trending
- Motor control
- Fan & pump status


Self-powered analog current sensor 0-10VDC output

- Self-gripping split-core for fast retrofit installation...no need to remove conductor
- No jumpers on unit...reduces installation error
- No external power required for sensor

Factory calibrated for ease of installation

- Factory calibrated field-selectable ranges (0-20/100/150A) for high resolution and installation ease
- One device to install...reduces installation charges
- Mounting bracket for installation flexibility
- 5 year limited warranty
- Made in USA

H923 LINEAR OUTPUT
Scale software as shown

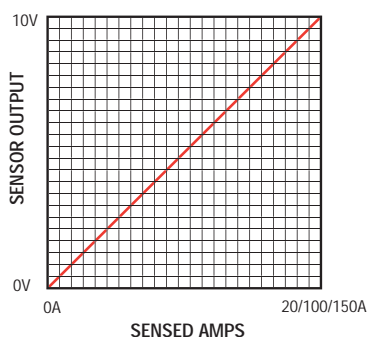

0-10VDC SELF-POWERED ANALOG!

ORDERING INFORMATION



MODEL	AMPERAGE RANGE	OUTPUT TYPE
H923	0-20/100/150A	0-10VDC, self-powered

ACCESSORIES

MODEL	DESCRIPTION
H700/900 DIN	DIN Rail Clip Set compatible with all split-core models

APPLICATIONS/WIRING EXAMPLE

Trending Motor Loads with the Hawkeye 923

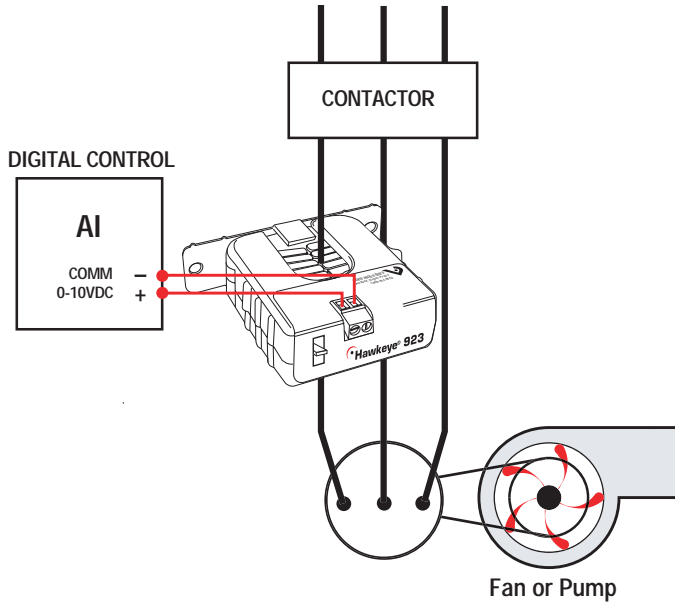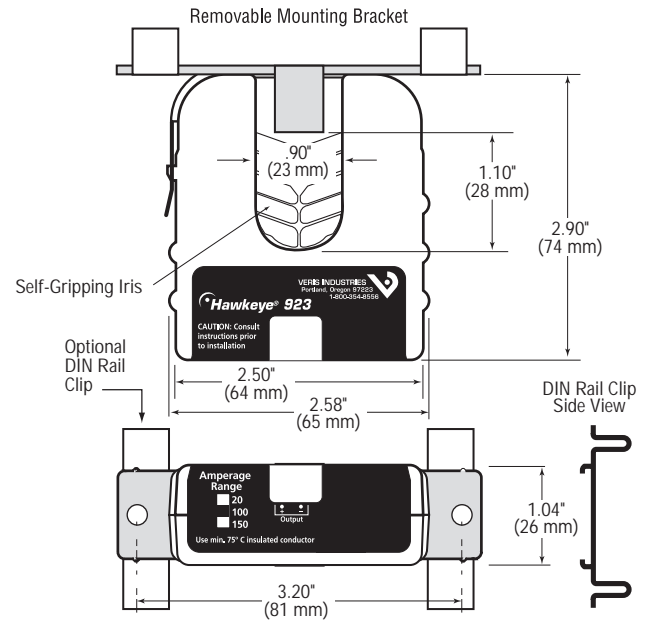**DIMENSIONAL DRAWINGS****SPECIFICATIONS**

Amperage Range	0-20/100/150A
Output	0-10VDC self-powered
Insulation Class	600VAC rms
Frequency Range	60Hz. nominal
Temperature Range	-15° to 60°C
Humidity Range	0 - 95% non-condensing
Accuracy	±2% full scale from 10% to 100% of full scale
Response Time	2 sec.
Dimensions... (L x W x H)	2.90" x 2.58" x 1.04"
Sensor Opening Size... (L x W)	1.10" x .90"