

## PRODUCT DESCRIPTION

**Sensors AWP with WiFi interface** are designed to measure temperature, relative humidity, barometric pressure, CO<sub>2</sub> concentration of the air in the non-aggressive environment. Communication with the sensor is done via wireless WiFi network. Sensor is designed to send measured values to online portal ATAL Cloud. It can provide values via www pages and by the Modbus TCP protocol as well. Sensors continuously evaluate measured values, in case of limits are exceeded, alarm e-mail is sent and set acoustic or optical signalisation. Measured values and alarm states are shown at the LCD display.

Device type	Measured values	Construction
<b>AWP-T</b>	T	With connected temperature sensor
<b>AWP-T1P</b>	T	Connector for external Pt1000/C probe
<b>AWP-T4P</b>	T	Connectors for up to four external Pt1000/C probes
<b>AWP-TR</b>	T + RH + CV	With connected temperature and relative humidity sensors
<b>AWP-TR1D</b>	T + RH + CV	Connector for external Digi/E probe
<b>AWP-TR2D</b>	T + RH + CV	Connectors for two external Digi/E probes
<b>AWP-TRCP</b>	T + RH + P + CO <sub>2</sub> + CV	With connected temperature, relative humidity sensor, internal sensors for barometric pressure and CO <sub>2</sub> concentration
<b>AWP-C</b>	CO <sub>2</sub>	Internal sensor CO <sub>2</sub>
<b>AWP-TRP</b>	T + RH + P + CV	With connected temperature, relative humidity sensors and internal barometric pressure sensors

T...temperature, RH...relative humidity, P...barometric pressure, CO<sub>2</sub>... concentration of CO<sub>2</sub> in the air  
CV...computed values (dew point, absolute and specific humidity, mixing ratio, specific enthalpy, humidex)


## INSTALLATION AND CONNECTION

**Fasten** the sensor directly to the wall using two screws or insert it into the lockable holder LP100 (optional accessories). The sensor is designed for a fixed installation. Keep the probes and device away from sources of electromagnetic interferences.

- always install the devices vertically with the antenna upwards in places with sufficient quality of the WiFi signal (check e.g. via a WiFi-enabled cell phone). Please make sure that the environmental characteristics correspond to the operating conditions
- connect the probes. The maximum cable length of the Digi/E probe is 15 m. Recommended cable length of the Pt1000/C probes is up to 15 m (max. 30 m)
- connect supplied power source into plug socket (use supplied cable to connect device into USB-C connector)

## DEVICE SETUP

To be able use all features of the device, it is mandatory to setup device. This task can be done by wireless connection via integrated access point or via USB cable. Setup via USB cable can be done from software which is free for download at [www.atal.nl](http://www.atal.nl). Setup procedure via integrated access point:

- newly purchased device is set into access point mode. This is signalled by symbol **AP** at the LCD display. In case of this symbol is not shown or there is symbol **CL** shown, please switch device mode manually by the buttons (see chapter "Buttons control").
- enable WiFi inside your laptop or cell phone and connect to access point with name **WiFiSensor\_XXXXXXXX**. In case of cell phone is used, it is recommended to switch off mobile data connection.
- open web browser and insert address <http://192.168.3.1>
- press setup button  at the main page to start device configuration. At the first step select **Network - Wifi client - Scan** and insert SSID a password for your WiFi network.
- activate connection into ATAL Cloud at the menu item **Cloud - Cloud mode** and select ATAL Cloud mode. Registration card for adding device into your account under ATAL Cloud is a part of shipment.
- at the menu **Channels** it is possible to set alarm limits
- to be all changes applied it is mandatory to **save settings**. After setup of SSID and saving settings is symbol **CL** shown.

## BUTTONS CONTROL

- **switching between client (CL) / access point mode (AP):**
  - press button MODE for longer than 3 seconds and after that confirm by button SET
- **showing current IP address of the WiFi sensor:**
  - short press of the MODE button

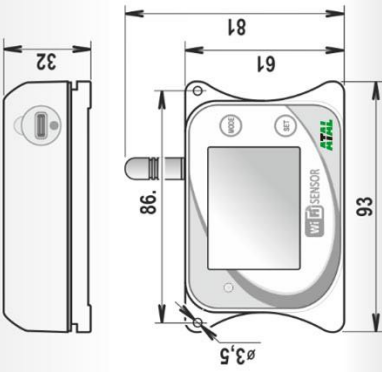
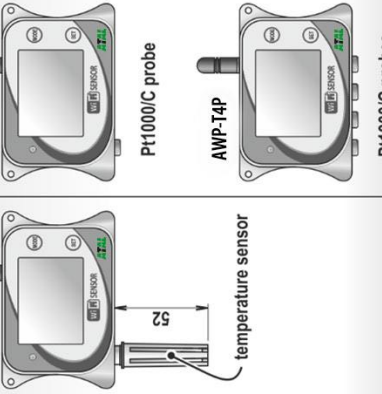
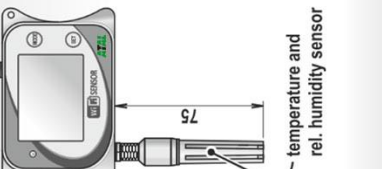
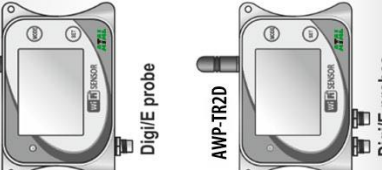
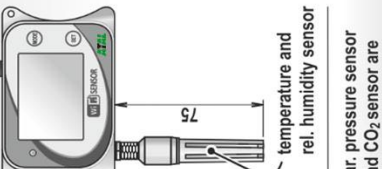
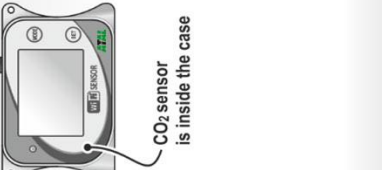
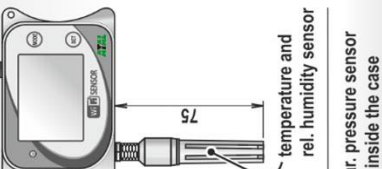
**The sensors do not require any special operation and maintenance.** We recommend doing regular verification of the accuracy of calibration measurements.

## SAFETY INSTRUCTIONS



- read the **Safety Instructions** for AWP series sensors carefully before using and follow them during device operation
- the devices contain electronic parts and must be disposed of according to local and currently valid legal conditions
- to complete the information provided in this manual, use the detailed manuals and other documents available in the "Download" section of the specific device at [www.atal.nl](http://www.atal.nl)

## Technical specifications

Device type	AWP-T	AWP-T1P, AWP-T4P	AWP-TR	AWP-TR1D, AWP-TR2D	AWP-TRCP	AWP-C	AWP-TRP
Power supply	supply voltage: 5.0 to 5.4VDC • consumption: typ. 150 mA (max. 500 mA) • connector: USB-C						
USB communication interface	USB 1.1 and USB 2.0 • connector: USB-C						
Radio section	frequency: 2.4 GHz • max. transmit power: 18 dBm • standard: IEEE 802.11 b/g/n • contain CC3220MODSF with FCC ID: Z64-CC3220MOD						
Internal temperature measuring range	-30 to +60 °C	—	-30 to +60 °C	—	-30 to +60 °C	—	-30 to +60 °C
Accuracy of internal temperature measurement	± 0.4 °C	—	± 0.4 °C	—	± 0.4 °C	—	± 0.4 °C
External temperature measuring range	—	-90 to +260 °C	—	—	—	—	—
Accuracy of external temperature measurement	—	± 0.2 °C / ± 0.002 x MV *	—	—	—	—	—
Relative humidity measuring range (without condensation)	—	—	0 to 95%RH	—	0 to 95%RH	—	0 to 95%RH
Accuracy of the relative humidity sensor	—	—	± 1.8 %RH **	—	± 1.8 %RH **	—	± 1.8 %RH **
Dew point of temperature measuring range	—	—	-60 to +60 °C	—	-60 to +60 °C	—	-60 to +60 °C
Accuracy of dew point temperature measurement	—	—	± 1.5 °C ***	—	± 1.5 °C ***	—	± 1.5 °C ***
CO <sub>2</sub> concentration measuring range	—	—	—	—	0 to 5000 ppm ****	—	—
Accuracy of CO <sub>2</sub> concentration measurement (25 °C • 1013 hPa)	—	—	—	—	± (50ppm + 0.03 x MV) ppmCO <sub>2</sub> MV-measured value	—	—
Temperature dependence of CO <sub>2</sub> measurement (-20 to 45 °C)	—	—	—	—	± (1 + MV/1000) ppmCO <sub>2</sub> / °C MV-measured value	—	—
Barometric pressure measuring range	—	—	—	—	700 to 1100 hPa	—	600 to 1100 hPa
Accuracy of barometric pressure measurement at 23 °C	—	—	—	—	± 1.3 hPa	—	± 1.3 hPa
Recommended calibration interval	2 years	2 years	1 year	1 year	1 year	5 years	1 year
Protection class of the case with electronics	IP30	IP30	IP30	IP30	IP30	IP30	IP30
Temperature operating range	-30 to +60 °C	-30 to +60 °C	-30 to +60 °C	-30 to +60 °C	-30 to +60 °C	-30 to +60 °C	-30 to +60 °C
Relative humidity operating range (without condensation)	0 to 95%RH	0 to 95%RH	0 to 95%RH	0 to 95%RH	0 to 95%RH	0 to 95%RH	0 to 95%RH
Barometric pressure operating range	—	—	—	—	700 to 1100 hPa	—	—
Recommended storage temperature range at 5 to 90 %RH	-30 to +60 °C	-30 to +60 °C	-30 to +60 °C	-30 to +60 °C	-30 to +60 °C	-30 to +60 °C	-30 to +60 °C
Recommended storage barometric pressure range	—	—	—	—	700 to 1100 hPa	—	—
Electromagnetic compatibility according to	ETSI EN 301 489-1	ETSI EN 301 489-1	ETSI EN 301 489-1	ETSI EN 301 489-1	ETSI EN 301 489-1	ETSI EN 301 489-1	ETSI EN 301 489-1
Weight	117 g	115 g	125 g	115 g	125 g	115 g	125 g
Dimensions [mm]							

\* accuracy of the device without probe in range -90 to +100 °C is ±0.2 °C, accuracy of the device without probe in range +100 to +260 °C is ±0.002 x MV (measured value in °C)

\*\* at temperature 23 °C in the range of 0 to 90 %RH (hysteresis ±1 %RH, non-linearity ±1 %RH, temperature error 0.05 %RH/°C at 0 to 60 °C)

\*\*\* at ambient temperature T < 25 °C and RH > 30 % (for details see graphs at instruction manual)

\*\*\*\* the device it is possible to deliver with a range of 0 to 10 000 ppm